

 **RIGHT WAREHOUSE**

# PEBLINE BUTYL TAPE SEALANT

A RIGHT WAREHOUSE.COM PRODUCT

MADE IN INDIA

 + 91-9582338989

 + 91-98115 40774

[www.rightwarehouse.com](http://www.rightwarehouse.com)


# PEBLINE BUTYL TAPE SEALANT



Creating a watertight seal is a must in metal roofing construction. **Double-sided butyl tape** offers a reliable and efficient solution for achieving this goal.

**PEBLINE Butyl Tape Sealant** is a double-sided, pressure-sensitive, non-curing adhesive sealant tape that uses a unique butyl synthetic rubber created by combining isobutylene and isoprene. It provides exceptional weatherproofing and adhesion. It is perfect for metal roof constructions, bonding roofing sheets, sealing flashing and trim joints in metal roofs.

## PRODUCT INSTALLATION

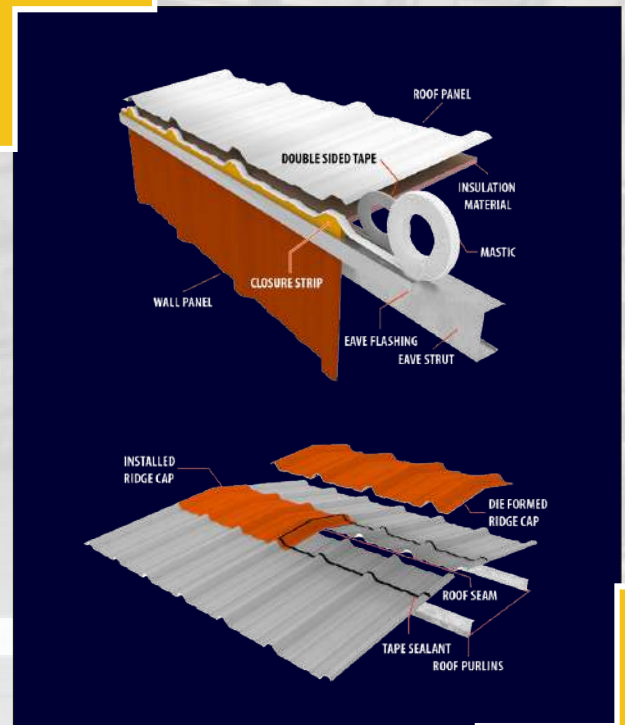

## FEATURES AND BENEFITS

- ✓ Does not contain certain asbestos and free from solvents.
- ✓ High solid, non-hardening, non-drying, non-oxidizing butyl tape.
- ✓ Flexible, good adaptability, Superior adhesion, Withstands high roof temperature.
- ✓ Excellent weatherproof sealing, not affected by normal movement of the structure.
- ✓ Extruded on silicone-coated release tape for easy application.

## GENERAL SPECIFICATION

- ❖ Solid content (composition): 100%
- ❖ Specific Gravity: 1.4 to 1.6 gm/cm<sup>3</sup>
- ❖ Service temperature range: - 40 to +100 degrees Celsius
- ❖ Application temperature: +5 to 45 degrees Celsius
- ❖ Shelf Life: 24 months
- ❖ High UV Resistance
- ❖ Elongation (400%-600%)

## APPLICATIONS

Seams, trims, roof vents, flashings, side and end lap sealing of metal sheets. It provides optimum sealing in harsh environments and does not harden, bleed or stain. Using butyl tape during metal roof installation helps ensure the roof will be properly protected from the elements for years to come.

## GENERAL MEASUREMENTS

Thickness	Width					Lenght
1mm	5MM	9mm	10mm	20mm	25mm	7m & 10m
1.5mm				20mm	25mm	7m & 10m
2mm			10mm	20mm	25mm	7m & 10m
2.5mm		9mm	10mm	20mm	25mm	7m & 10m
3mm		9mm	10mm	20mm	25mm	7m & 10m
4.8mm		9mm	10mm	20mm	25mm	7m & 10m
5mm	6mm	9mm	10mm	20mm	25mm	7m & 10m
6mm			10mm	20mm	25mm	7m & 10m

## WE CUSTOM MANUFACTURE SEALANT TAPES TAILORED TO YOUR SPECIFIC MEASUREMENTS AND REQUIREMENTS.

Gutter		
Thickness	Width	Length
3mm	50mm	5mm
6mm	50mm	5mm

## SAFETY PRECAUTIONS

- ❖ For best results, do not apply PEBLINE Butyl Tape sealant when the metal roof temperature is below -5 degrees Celsius and above +45 degrees Celsius.
- ❖ Applications where the service temperature exceeds 100 degrees Celsius should be avoided, as PEBLINE Butyl Tape Sealant can undergo thermal degradation.
- ❖ PEBLINE Butyl Tape Sealant should not be installed or placed under translucent or clear materials that may be exposed to direct sunlight. The intensification of the sun can raise temperatures, potentially compromising the material's condition.
- ❖ Before using PEBLINE Butyl Tape Sealant products, a suitably qualified professional must verify all specifications and calculations.

## NOTE OF CAUTION

- ❖ All information provided is non-binding and without guarantee.
- ❖ This document is subject to revision, and we reserve the right to make technical changes.

# **RIGHT WAREHOUSE**

**Headquartered in noida, we are dedicated to delivering professional-grade metal roofing and building solutions for projects nationwide, ensuring customer satisfaction.**

---

**Right Warehousing Solutions® LLP by Route 2 Market®,  
A-10, Sector -19, Noida -201301 Uttar Pradesh, India**

**DOMESTIC BUSSINESS:**

**MATHEWS @ +91 9811 540 774**

**INTERNATIONAL BUSSINESS:**

**AMIT MITTAL @ +91 98 919 66 700**

 **+91 95 82 33 8989**

 **WAREHOUSE@RIGHTWAREHOUSE.COM**

**www.rightwarehouse.com**



**We Support – The Association Of Warehouse Developers Uttar Pradesh**